



01
Pro
Professional's
Choice

02
Ho
Home Owner's
Choice

LAMBDABOARD[®]

INVERTED ROOF INSULATION

LAMBDABOARD[®] is the ideal choice for inverted roof insulation, often allowing extended life expectancy on aging steel roofing systems and bringing buildings within the SANS 10400XA requirements. Lambdaboard is durable and can withstand moderate foot traffic, for high volume foot traffic it is advisable to use Lambdaguard as a protective layer.

It is suggested that a waterproof membrane or covering is applied as a weather barrier. The material offers highest levels of insulation properties. PIR foams are the preferred insulation material used in developed countries and have been used for over 50 years.



INVERTED ROOF INSULATION

INSULATION

LAMBDABOARD® has the best insulation values available per mm, this allows for the use of a thinner board and while still complying to the thermal requirements. A stagger pack is advisable should the required thickness exceed 80 mm, this reduces the possibility of thermal bridging on the joints.

APPLICATIONS





- Durable outer protection on insulation medium under floor
- Inverted roof
- Suitable for stone ballast
- Torch on waterproofing
- Loose lay / TPO membranes

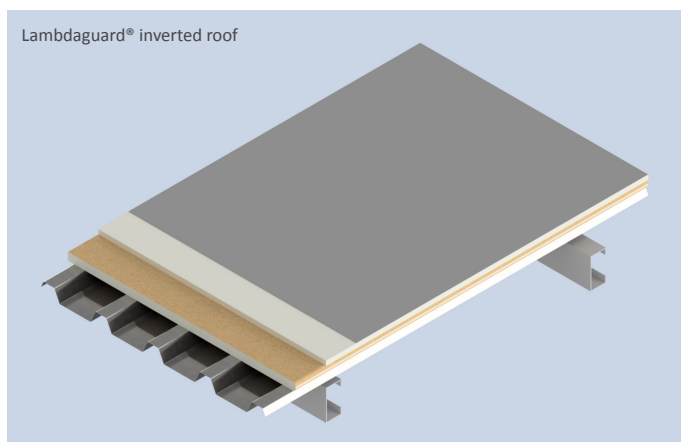
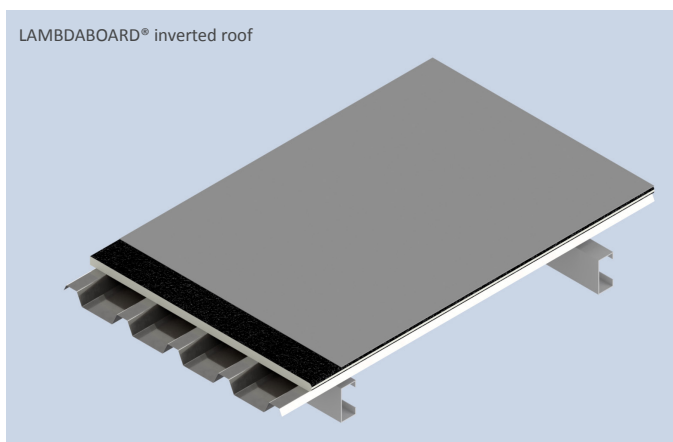
INSTALLATION

- The existing roof system must be cleaned and free of contaminates.
- Lambdaboard must be tightly packed on the roof and secured using a PU adhesive or mechanical fastener (or both).
- Depending on foot traffic requirements Lambdaguard can be used as a protective layer.
- A suitable waterproofing systems must be applied as a weather barrier.

SPECIFICATION FOR BOQ

LAMBDABOARD® is a laminated polyisocyanurate core board with a minimum core density of 34 kg/m³, a minimum thickness of ____ mm; faced with ____ and laminated on both sides. Suppliers fixing details supplied in widths of 1220 mm. To be fixed above rigid insulation using a mechanical fastener or PU adhesive.

<p>LONG TERM THERMAL RESISTANCE</p>  <p>⏪</p>	<p>LABOUR SAVING</p> <p>↓</p> <p>75%</p> <p>⏪</p>	<p>TEMPERATURE RANGE</p>  <p>-30° C to 120° C</p> <p>⏪</p>	<p>HIGH COMPRESSIVE STRENGTH</p>  <p>⏪</p>	<p>ENERGY SAVING</p> <p></70%</p> <p>With a rational design</p> <p>⏪</p>	<p>LOW MAINTENANCE</p>  <p>Thickness: 25 mm to 100 mm</p> <table border="1"> <tr> <td>Width: 1220 mm</td> <td>Length: Cut to size Minimum: 1350 mm</td> </tr> </table> <p>⏪</p>	Width: 1220 mm	Length: Cut to size Minimum: 1350 mm
Width: 1220 mm	Length: Cut to size Minimum: 1350 mm						



www.lambdaboard.co.za
lambdaboard@rigifoam.com
+27 (0)11 421 0313

Members of:



Proudly produced by:



DISAVOWAL: The customer acknowledges and understands that after delivery, the goods will have left the control of Rigifoam (Pty) Ltd, and that the customer will be responsible for the unpacking of and connection/installation of the goods. The customer acknowledges that it is his/her further responsibility to ensure that a fully qualified and competent person is used to install the goods to ensure their effective operation. Failure by the customer to ensure the installation of the goods, according to the written instructions of the manufacturer and/or supplier, by a fully qualified and competent person, may result in the failure of the goods, injury, loss or damages to the customer. Accordingly, and in this event, Rigifoam (Pty) Ltd accepts no responsibility for any loss or damages that might arise by reason of death or personal injury to any person engaged in the installation or use of the goods thereafter, subject to the provisions of the Consumer Protection Act 68 of 2008.