

ULTRASEAL SYSTEM BUILD-UP



INVERTED SHEETED ROOF WATERPROOFING

SUBSTRATE CONDITIONS & PREPARATION

SUBSTRATE

All surfaces must be cleaned to ensure that all dust and debris, loose and flaking previously applied paint, algae growth or any other contaminants are removed. High pressure washing, scrubbing with water soluble detergent may be used.

METAL SHEETING

New sheeting needs to be properly cleaned using a suitable galvanise cleaner to ensure the complete removal of any oil or wax layers. Any form of corrosion must be mechanically removed to white metal and treated with rust a inhibiting primer.

TILED ROOFS

Inspect for broken or missing tiles. Ensure ridge mortar is still sound and in place. Inspect gullies/valleys and make sure they are clean and corrosion free.

PRODUCT SELECTION & APPLICATION

Application of the **UltraSeal Acrylic** single component acrylic waterproofing system may be undertaken by brush, roller or airless spray. Apply each coat at a maximum of 1.1 Lt per M² to achieve a final coating thickness of 0.5 – 1 mm on the sheeting body and 1.5 – 2 mm over the sheeting laps which have been reinforced with a Polyester membrane.

Estimate price/m²: R


UltraSeal Polyurathane

LAMBDA Guard

LAMBDABOARD®

LAMBDABOARD® Flute Wedges

Roof Sheets

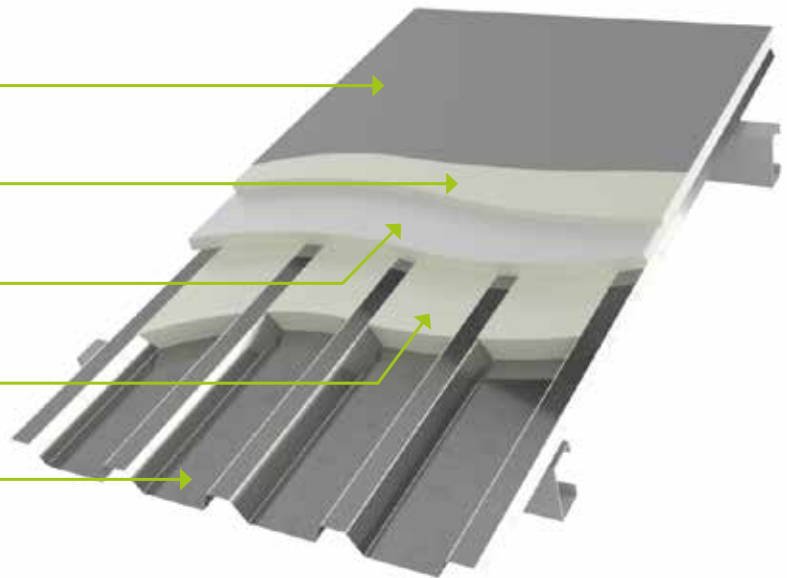

Manufactured by NUI – Member of the RIGIFoam Group

www.ultraseal.co.za
www.rigifoam.co.za
+27 (0)11 421 0313



DISAVOWAL: The customer acknowledges and understands that after delivery, the goods will have left the control of Rigifoam (Pty) Ltd, and that the customer will be responsible for the unpacking of and connection/installation of the goods. The customer acknowledges that it is his/her further responsibility to ensure that a fully qualified and competent person is used to install the goods to ensure their effective operation. Failure by the customer to ensure the installation of the goods, according to the written instructions of the manufacturer and/or supplier, by a fully qualified and competent person, may result in the failure of the goods, injury, loss or damages to the customer. Accordingly, and in this event, Rigifoam (Pty) Ltd accepts no responsibility for any loss or damages that might arise by reason of death or personal injury to any person engaged in the installation or use of the goods thereafter, subject to the provisions of the Consumer Protection Act 68 of 2008.