



01

Pro

Professional's
Choice

02

Ho

Home Owner's
Choice

LAMBDABOARD[®]

SLAB INSULATION

COLD DECK - UNDER SOFFIT

LAMBDABOARD[®] is the ideal choice for under soffit insulation in all building categories especially in retrofits. It is manufactured in a continuous process with a closed cell PIR core bonded to 2 flexible substrates.

LAMBDABOARD[®] has a white mineral finish and offers excellent fire performance with ASIB approval and unmatched R-Value in the market. LTR LAMBDABOARD[®] will guarantee its R-Value for the lifespan of the building.



SLAB INSULATION, COLD DECK - UNDER SOFFIT

BENEFITS

With its white mineral finish LAMBDABOARD® offers an aesthetically pleasing soffit

ASIB approved

Thermoset does not drip or spread flame

Moisture resistance

Reduces energy usage in the building


SPECIFICATION FOR BOQ

LAMBDABOARD® is a laminated polyisocyanurate core board with a minimum core density of 34 kg/m³, a minimum thickness of ____ mm; faced with ____ and laminated on both sides. Suppliers fixing details supplied in widths of 1220 mm with a ____ (Km²/W) R-Value. Finish will be white mineral and mineral natural laminated on each side. LAMBDABOARD® must be installed using nylon anchors fixed through the board into concrete in accordance with manufacturer’s specifications.

INSTALLATION

LAMBDABOARD® must be installed flush on the underside of the soffit using nylon anchors or adhesives. LAMBDABOARD® is easy to install due to its lightweight design. LAMBDABOARD® can be left with its white mineral finish, or it can be plastered or painted.

<p>LONG TERM THERMAL RESISTANCE</p> <p><</p>	<p>LABOUR SAVING</p> <p>75%</p> <p><</p>	<p>TEMPERATURE RANGE</p> <p>-30° C to 120° C</p> <p><</p>	<p>HIGH COMPRESSIVE STRENGTH</p> <p><</p>	<p>ENERGY SAVING</p> <p>>/70%</p> <p>With a rational design</p> <p><</p>	<p>LOW MAINTENANCE</p> <p>Thickness: 25 mm to 100 mm</p> <p>Width: 1220 mm</p> <p>Length: Cut to size Minimum: 1350 mm</p> <p><</p>	<p>MOISTURE RESISTANCE</p> <p>On cavity wall and under screed installations</p> <p><</p>
--	---	---	---	--	---	--

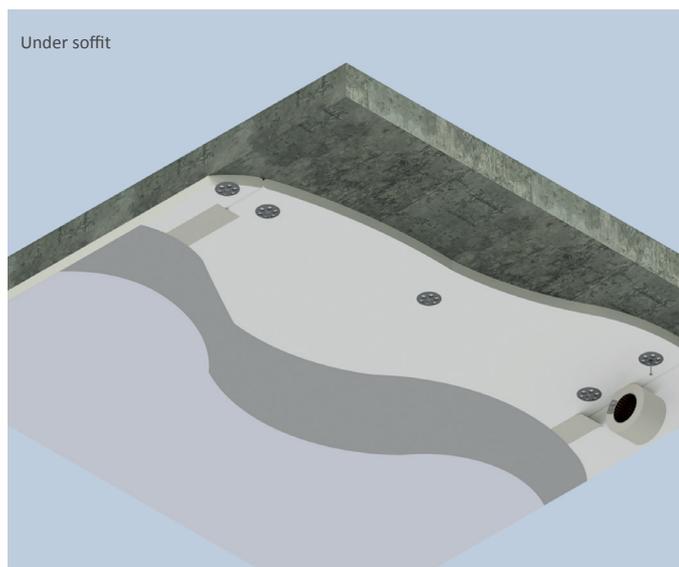

www.lambdaboard.co.za
lambdaboard@rigifoam.com
+27 (0)11 421 0313

Members of:



Proudly produced by:



DISAVOWAL: The customer acknowledges and understands that after delivery, the goods will have left the control of Rigifoam (Pty) Ltd, and that the customer will be responsible for the unpacking of and connection/installation of the goods. The customer acknowledges that it is his/her further responsibility to ensure that a fully qualified and competent person is used to install the goods to ensure their effective operation. Failure by the customer to ensure the installation of the goods, according to the written instructions of the manufacturer and/or supplier, by a fully qualified and competent person, may result in the failure of the goods, injury, loss or damages to the customer. Accordingly, and in this event, Rigifoam (Pty) Ltd accepts no responsibility for any loss or damages that might arise by reason of death or personal injury to any person engaged in the installation or use of the goods thereafter, subject to the provisions of the Consumer Protection Act 68 of 2008.